

# > Dual flush telescopic OPTIMA 49




## DESCRIPTION

- > Can be installed into plastic or ceramic cisterns
- > Push button: dual flush
- > Actuation effort below 20 Newton
- > For lid holes ranging from Ø 16 to 50mm, with or without collar depending on the diameter
- > Button off-center +/- 15mm
- > Stirrup : adjustable in increments of 12mm
- > Overflow can be cut in increments of 4mm
- > Adjustable small flush from 2l to 4.5l
- > Adjustable dead water level
- > High flush rate of 3.5l/s
- > Foam pan seal supplied for compensating pan irregularity



**RAISED BUTTON AVAILABLE**  
(see page 55 for more details)

- Adjustable height (B):
- With collar: from 282 to 430mm (lid hole Ø ranging from 16 to 38mm and 43 to 50mm)
  - Without: from 300 to 448mm (lid hole Ø ranging from 39 to 42mm)
- Adjustable overflow height (C): 155 to 245mm
- Compatible with:
- Lid hole Ø (A) from 16 to 50mm
  - Drainage hole Ø (D) from 58 to 72mm

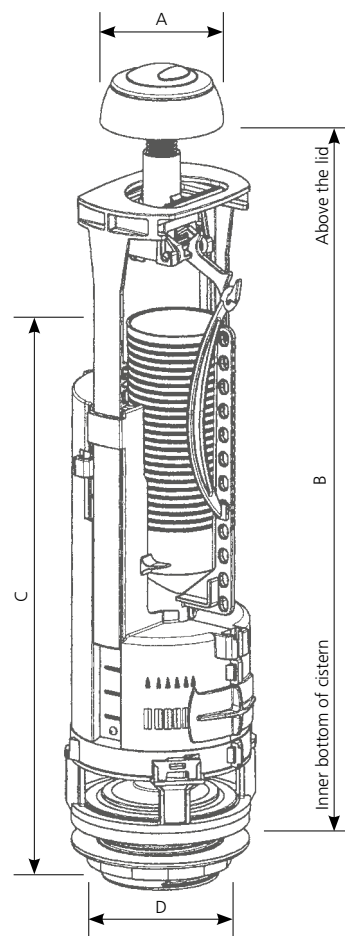

## TEXT FOR TENDERS:

### OPTIMA 49 WRAS NF

Dual flush valve WRAS and NF certified, compact and water saving. The stirrup fixes the cistern lid once the button is screwed down and enables a non alignment position. Adjustable button with optional collar.

Adjustable height from 282 and 430 mm, lid hole from 16 to 50, discharge hole from 58 to 72 mm. Adjustable : small flush, over flow, dead water level.

	Ref.	Barcode	Packing	Packing			Pallet quantity
				Nb	M <sup>3</sup>	Kg	
OPTIMA 49	32 4999 10	3 24723 007129 6	Box	14	0.08	9	210
Optima 49 raised button	34 5054 07	3 24723 004328 6	Bag	250	0.07	12.5	-

